





SPECIFICATIONS

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA9T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

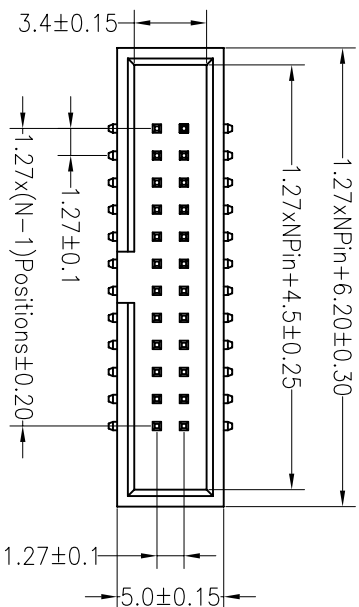




Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

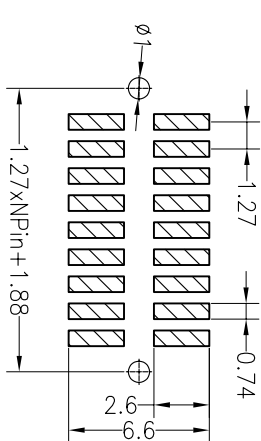

Ordering Information

3230 XX M XX X B K00 X 0X

- No. of Pins: 10-100P
- Contact Plating: G0:Gold Flash, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold, S0:Gold Flash/Tin, SN:Tin
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, E=BK-PA9T, F=BK-LCP
- Packaging: 0=PE Bag, A=Troy, T=Tube, P=Tube+Cap

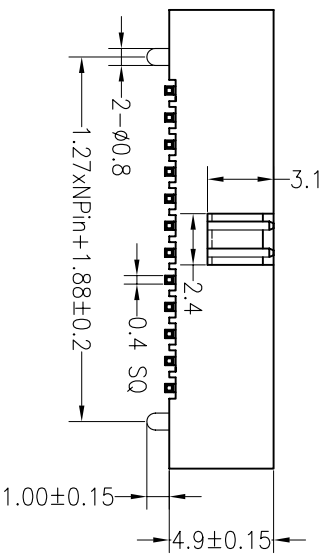

OPERATION		DRAW		SCALE		FIT	
XX	±0.30	YYS	Sheng	UNIT	mm	1/1	PROJ.
B	change terminal L=6.8mm → L=7.0mm			X.XX	±0.20	A4	
A0	NEW DRAWING			X.XXX	±0.10	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		TITLE:	
1						PART NO. 3230-XXMXXBK000X	
2						1.27Box Header Npin H4.9 SMT	
3							
4							
5							
6							
7							
8							
9							

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992