





HSF ROHS **us** **CE**

SPECIFICATIONS

Rated(额定参数): 300V,8A
 Dielectric strength(抗电强度): AC1500V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):20mΩ Max
 Wire Range(线径):26~16AWG
 Strip length(剥线长度):10mm
 Temp. range(操作温度): -40℃~+105℃
 MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PA66 (UL94 V-0)
 Contact(端子): Phosphor Bronze, Tin plating(磷铜镀锡)
 Reed(弹片): Stainless steel (不锈钢)


	PITCH RANGE		NOMINAL DIMENSION RANGE					
	IN MM		IN MM		IN MM		IN MM	
TO	OVER	OVER	TO	OVER	TO	OVER	TO	OVER
6	10	10	30	60	60	100	100	OVER
	10	24	30	TO	TO	TO	150	150
			60	100	150			
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00	

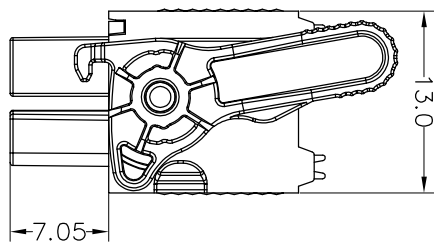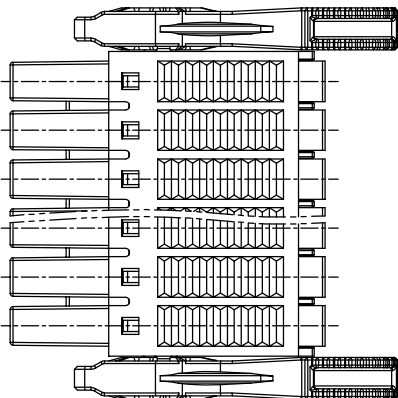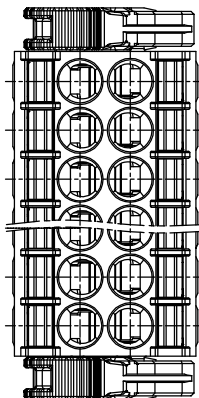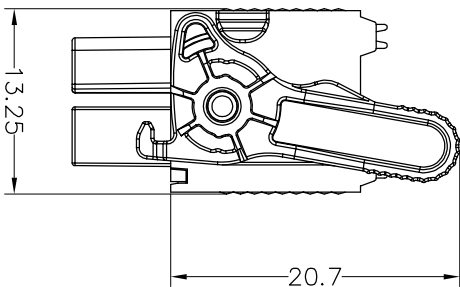

Ordering Information

JL15EDGKNHG - 350 XX X X 1

Pitch 350=3.5PH
 No.of pins 4P~48P
 Housing Color B=Black G=Green U=Blue R=Red W=White Y=Yellow O=Orange E=Grey
 Packing 0=Pe bog A=Tray

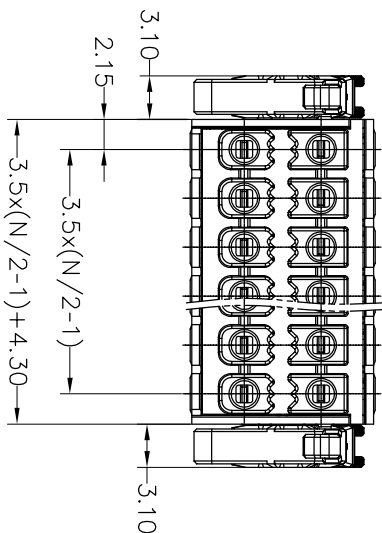

OPERATION		DRAW		SCALE		FIT		PART NO.	
XX	±0.30	yyusheng	19.12.15	UNIT	mm	A4	1/1	JL15EDGKNHG-350XXXX1	
X:XX	±0.20	CHECK		SIZE					
X:XXX	±0.10			SHEET	1/1				
Angle	±3°	APPROVE		PROJ.					
DIM	TOL								
1	2	3	4	5	6	7	8	9	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE			TITLE:	3.5mm Pitch Female Pluggable Terminal Blocks		
A0	2019.12.15	NEW DRAWING							

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992