

SPECIFICATIONS

Rated(额定参数): 300V,8A
 Dielectric strength(抗电强度): AC1500V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):20mΩ Max
 Wire Range(线径):16~28AWG
 Strip length(剥线长度):8~9mm
 Temp. range(操作温度): -40℃~+105℃
 MAX Soldering(瞬时温度):+260℃,5s
 IEC Standard

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	320V	250V	160V
Rate current(A)	7A		



Housing Material(塑件): PA66 (UL94 V-0)
 Contact(端子): Phosphor Bronze, Tin plating(磷铜镀锡)

PITCH RANGE	NOMINAL DIMENSION RANGE										
	IN MM		IN MM		IN MM						
TO 6	OVER 6	TO 10	OVER 10	TO 30	OVER 30	TO 60	OVER 60	TO 100	OVER 100	TO 150	OVER 150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.30	±0.50	±0.70	±1.00			

Ordering Information

JL15EDGKD - 381 XX G 01

Pitch 381=3.81PH No. of pins 2P,3P,4P~24P
 Housing Color B=Black G=Green U=Blue R=Red W=White Y=Yellow O=Orange E=Grey
 Packing 0=Pe bog T=Tube A=Tray

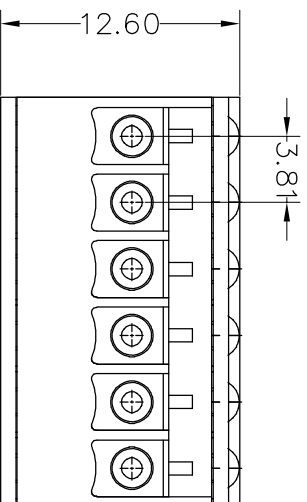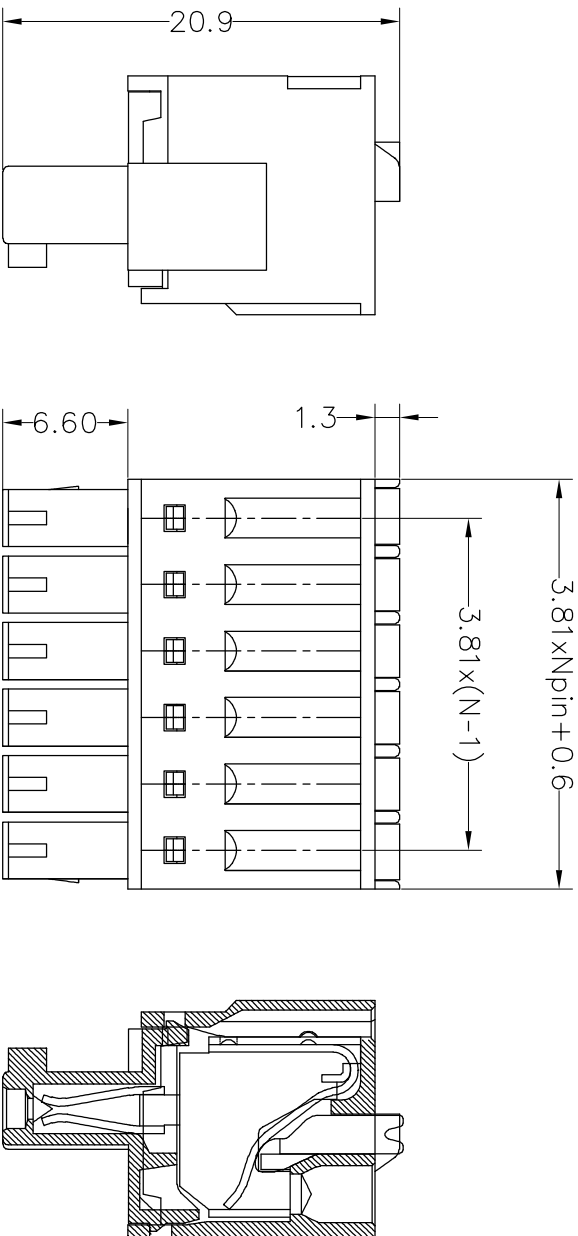

DRAW	SHUANGPING ZHENG	SCALE	FIT	<p>JIN 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD</p>	
CHECK	LICHAO LIU	UNIT	mm		
APPROVE	YONGLANG GAO	SIZE	A4		
		SHEET	1/1	PART NO.	JL15EDGKD-381XXG01
		PROJ.		TITLE:	JL15EDGKD-381-XXP插拔式插座绿色