



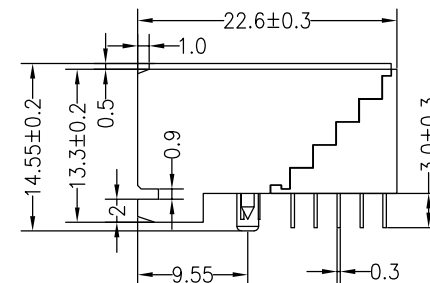

SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor bronze
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: LCP
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

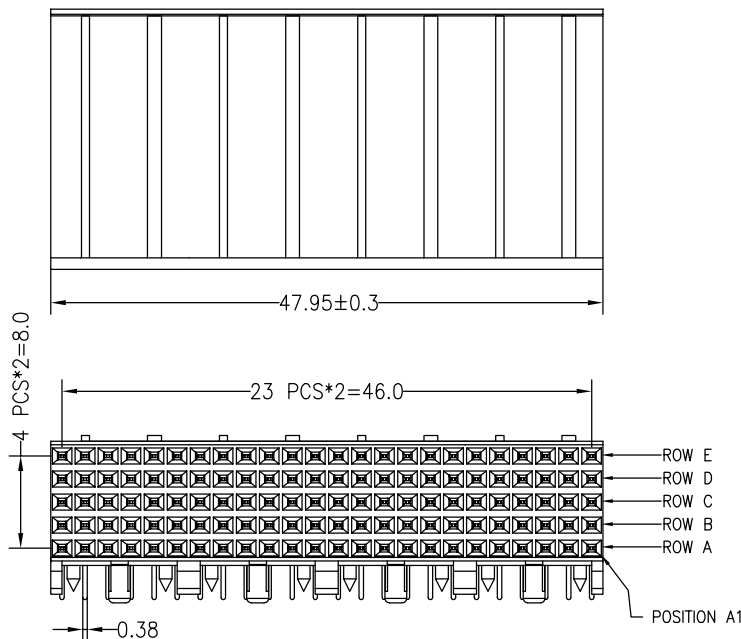

Ordering Information



35105 120 A F R XX BW X 1

No. of Pins
5X24P

Contact Type
F:Female
M:Male

Contact Plating
G0:Gold Flash
S0:Gold Flash/Tin
S1:2U" Gold/Tin
S2:5U" Gold/Tin
S3:10U" Gold/Tin
S4:15U" Gold/Tin
S5:30U" Gold/Tin
SN:Tin

Packing
A:Tray
T:Tube

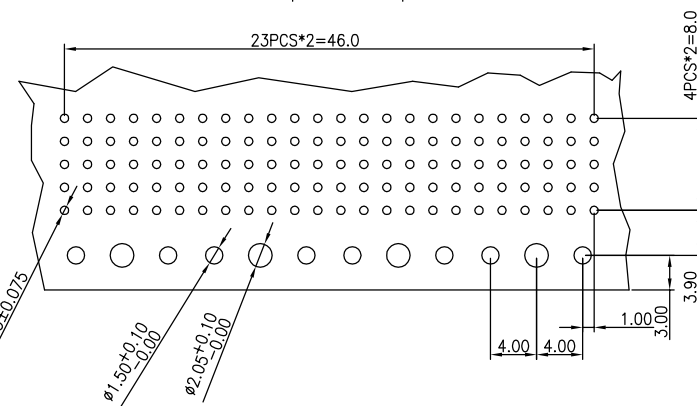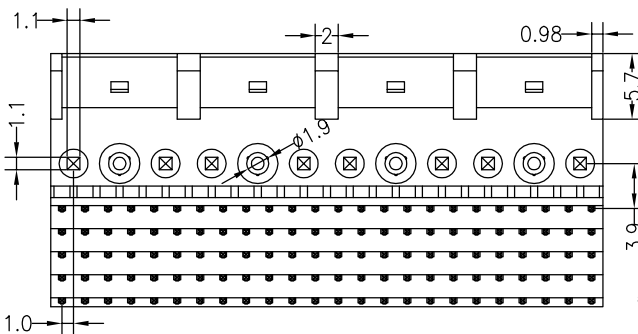

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

			OPERATION		DRAW	YiYuSheng	19.10.09	SCALE	FIT	JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
			X.X	±0.30				UNIT	mm		
					CHECK			SIZE	A4	PART NO.	35105120AFRXXBW1
								SHEET	1/1	TITLE:	FUTURE BUS,5*24 Female 90°
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE					