

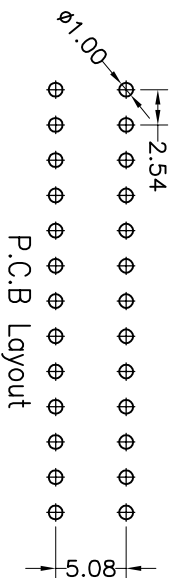
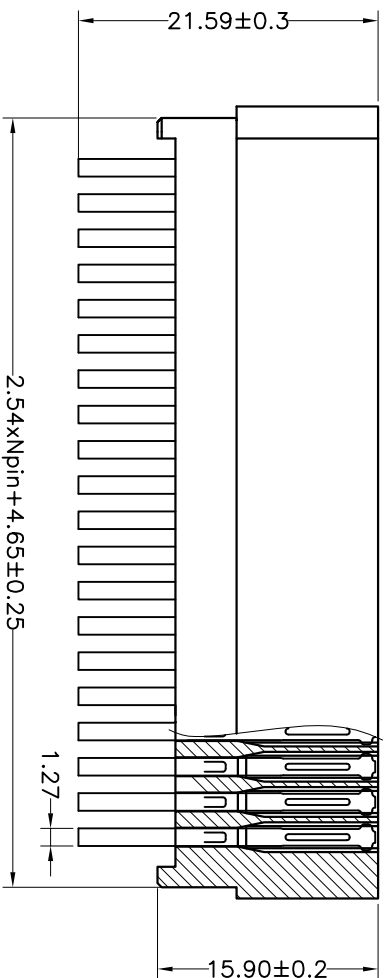


HSE ROHS

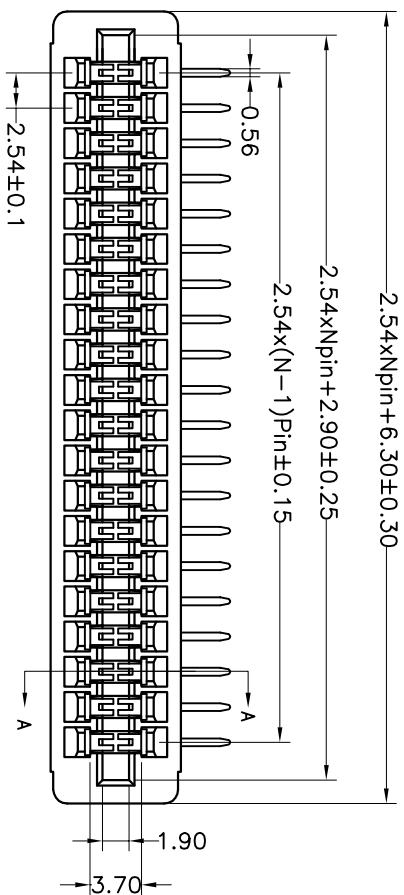

Ordering Information
5480 - XX B XX R B 01
 No. of Pins: 00-99P
 Contact Plating: Sn/Gold Flash/Tin
 SN:7in

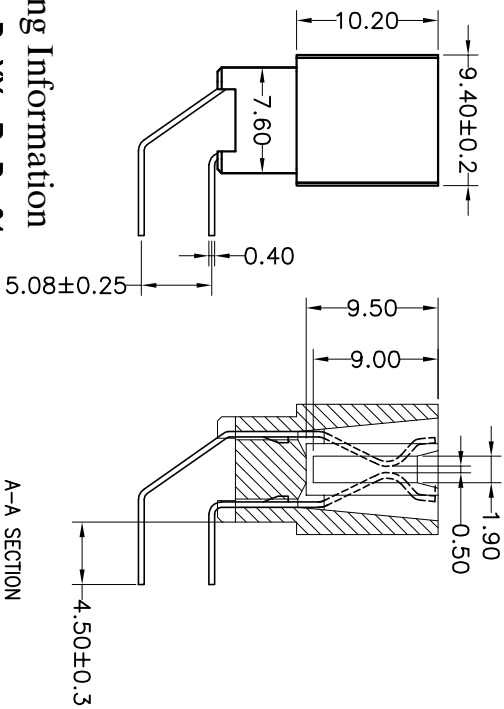

SPECIFICATIONS
 Rated Current: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor bronze
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

OPERATION		DRAW		SCALE		FIT		TITLE:	
X.X		YYuSheng		UNIT		mm		PART NO.	
±0.30		18.03.30		A4		1/1		5480-XXBXXRB01	
X.XX		CHECK		SIZE		SHEET		SLOT 2.54mm H15.9 NPin 90° DIP	
±0.20				A4		1/1			
X.XXX		APPROVE		PROJ.					
±0.10									
Angle									
±3°									
TOL									
CHANGE									
MODIFICATION DESCRIPTION									
NEW DRAWING									
DATE									
2018.03.30									
REV									
1									

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892